REACH
Better Quality Better Price

宁波瑞琦电力机具有限公司
NINGBO REACH ELECTRIC POWER TOOLS CO., LTD.

Hydraulic Tensioner - Technical Parameters	
Performance Parameters	Main Components
Maximum Tension(kN): 2×35 or 1×70	Main Component
Continuous Tension(kN):2×30 or 1×60	Engine :Cummins /DEUTZ
Maximum speed (km/h):5	Main variable pump:SAUER-DANFOSS
Bullwheel bottom of groove diameter (mm) :Φ1200	Main motor: EATON
Number of grooves:2×5	Radiator:AKG
Maximum pullback (kN):2×30 or 1×60	Hydraulic valve: rexroth(HUADE)
Maximum speedback (km/h):2×1	Hydraulic instrument: DONGFANG
Engine power /speed (kW/rpm):38/2500	
Dimensions (mm): 4100×2100 ×2600	
Weight(kg):4000	

PHOTO GALLARY
















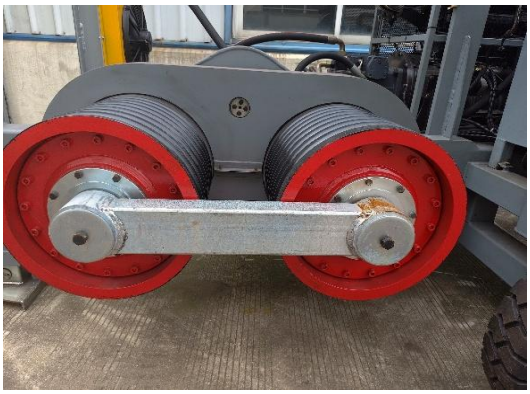

7 TON HYDRAULIC REEL STAND





